



PLUGS – DISC PLUGS *SPECIFICATIONS*

Stemar disc plugs are designed to seal the host pipe to pressure up to 5-15 PSI (depending on model) in limited space applications where regular pneumatic plugs would be too long.





Stemar disc plugs, manufactured by Vanderlans and Sons, are proudly made in the USA with rolled channel steel, natural rubber, and synthetic cording reinforcement.



Common applications for disc plugs include air testing, pressure monitoring, stopping pipeline flow, atmospheric isolation, or any other job that requires a leak proof seal for construction, rehabilitation, cleaning, or testing.

**CUSTOM OPTIONS AVAILABLE
CALL 800-992-0100!**

With a budget and lead time, Stemar disc plugs can be custom made and adapted to any jobsite requirements; stainless steel metalwork and neoprene bladders for hydrocarbon resistance, multiple offset bypass openings, manway doors, split-piece construction, 3, 4, 5, or 6 sided, and more!!!

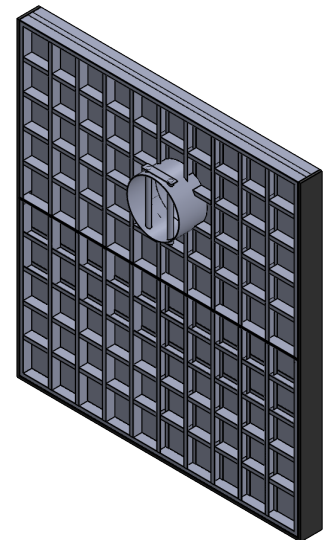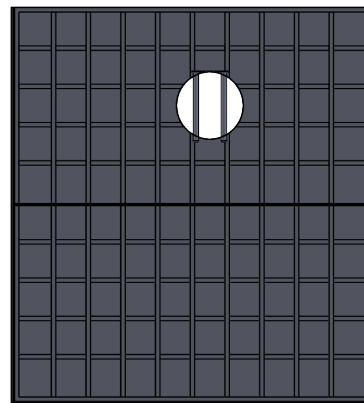



DISC PLUGS

Plug Size	Stemar RC#	Usage Range (Pipe ID)	Inflation Pressure	Maximum Back/Test Pressure	Product Weight	Deflated Length	Deflated Diameter
16"-19"	2121	16.50"-19.50"	80 PSI	15 PSI	26 lbs	11.50"	16.125"
19"-22"	2122	19.625"-22.50"	80 PSI	15 PSI	31 lbs	11.50"	19.625"
24"	-	23.50"-24.25"	20 PSI	5 PSI	30 lbs	10"	23.50"
22"-25"	2123	22.50"-25.50"	80 PSI	15 PSI	41 lbs	11.50"	22.4375"
25"-28"	2124	25.50"-28.50"	80 PSI	15 PSI	51 lbs	11.75"	25.50"
30"	2112	29.50"-30.25"	20 PSI	5 PSI	90 lbs	10"	29.0"
28"-31"	2125	28.50"-31.50"	80 PSI	15 PSI	60 lbs	11.75"	28.1875"
36"	2114	35.50"-36.25"	20 PSI	5 PSI	127 lbs	10"	35.0"
42"	2116	41.50"-42.25"	20 PSI	5 PSI	155 lbs	10"	41.0"
48"	2118	47.50"-48.25"	20 PSI	5 PSI	183 lbs	10"	47.0"
54"	2119	53.50"-54.25"	20 PSI	5 PSI	265 lbs	10"	53.0"
60"	-	59.50"-60.25"	20 PSI	5 PSI	310 lbs	10"	59.0"
66"	2020	65.50"-66.25"	20 PSI	5 PSI	355 lbs	10"	65.0"
72"	-	71.50"-72.25"	20 PSI	5 PSI	400 lbs	10"	71.0"
78"	-	77.50"-78.25"	20 PSI	5 PSI	445 lbs	10"	77.0"
84"	-	83.50"-84.25"	20 PSI	5 PSI	525 lbs	10"	83.0"
90"	-	89.50"-90.25"	20 PSI	5 PSI	605 lbs	10"	89.0"
96"	-	95.50"-96.25"	20 PSI	5 PSI	700 lbs	10"	95.0"

ALWAYS BLOCK PLUGS WHEN CONDUCTING AIR OR WATER TESTS



Always read and understand how to safely use Pipe Plugs and testing equipment before attempting. Stemar provides safety instructions with every plug rental and additional copies can be downloaded from our website or requested by calling us at (800) 992-0100.