

7281S

DuraTech® 60' 3-way SRL-R with Stainless Steel Cable for Tripods

Features :


- Delivers reliable 3-way operation an SRL and a Retrieval Winch for emergency rescue
- Heavy-duty, lightweight and corrosion resistant cast aluminum housing construction.
- Features rugged Internal inertial braking system with dual disc brakes
- 3/16" stainless steel cable lifeline with load-indicating swivel snap hook
- Features integrated proprietary tripod leg mounting bracket
- Includes 20" weather-resistant storage bag
- Complies with ANSI Z359.14-2014



Material Specifications	
Cable	3/16" stainless steel; 3,400 lb min. static strength
Lifeline Connector	Plated alloy steel; 5,000 lb min. static strength with 3,600 lb gate strength
Housing and Drum	Machined aluminum alloy

Performance Specifications	
Static Strength	3,000 lb min.
ANSI SRL Class	Class B
Avg. Arrest Force	1,125 lb
Max Arrest Force	1,800 lb
Max Arrest Distance	54"
ANSI User Capacity	130 to 310 lb max.
OSHA User Capacity	130 to 310 lb max.

Compliant With:	
ANSI	Z359.14-2014
OSHA	1926.502 and 1910.66

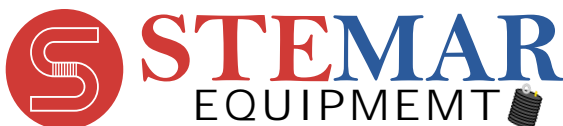

SALES • RENTAL • SERVICE
 353 S. Central Avenue, Los Angeles, California 90013
 800-992-0100 stemarinc.com